

smart

VTK 200 TT

EAC & CE
CERTIFICATE



SPARE PART
SUPPORT



%70 POWER
ECONOMY





24 MONTHS
GUARANTEE



RENEWABLE
MACHINE



HIGH
SAFETY

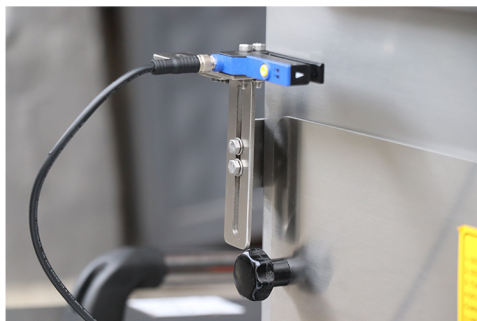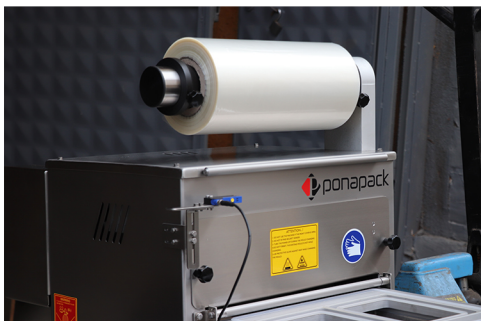

VTK 200 TT

Completely made of stainless steel. The mold and aluminum parts are eloxal coated. Values can be monitored numerically and graphically with the touch operator panel and any action can be done easily. The pneumatic system, gas pressure and vacuum values are controlled by sensors on the machine and operator is directed by warning message on display. It provides unlimited mold choice and high performance with the easy to replace mold system. Safety is provided by CE standards. It automatically switches to stop while installing the film or replacing the mold, by the help of security sensors.



smart

VTK 200 TT

Technical Specifications

INSTALLED POWER	220 - 400V 50HZ, 16A
VACUUM PUMP	20 M3
ENERGY CONSUMPTION	1.2 KW
AIR PRESSURE	MAX 6 BAR
AIR CONSUMPTION	3.6 CYCLE
CAPACITY/MIN	4 CYCLE PER MIN
MAX. MOLD DIMENSIONS	349X289MM MAX.
WEIGHT NET/PACKAGED	120 - 160 KG
MAX. PLATE DEPTH	100 MM
MAX. FILM WIDTH	350 MM
MIN. FILM THICKNESS	30 MIC
MAXIMUM FILM WEIGHT	8 - 10 KG
MACHINE DIMENSIONS	540X894X777 MM

MAXIMUM PLATE SIZE

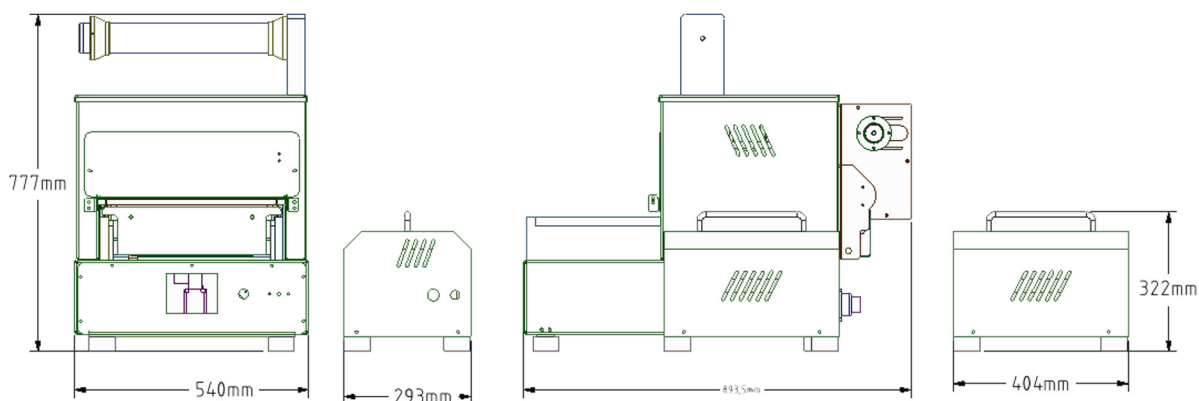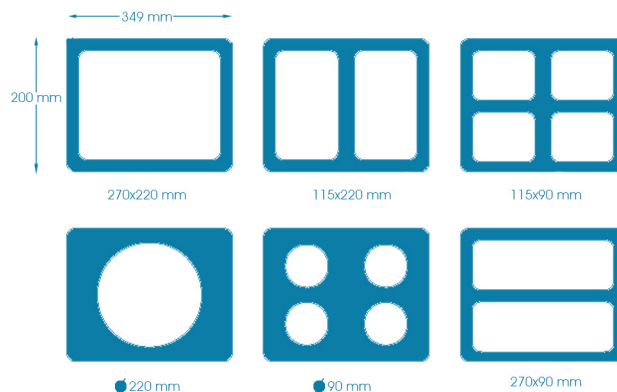

VTK 200 TT Advantages

Vacuumed and gaseous tray sealing feature	Soft vacuuming opportunity with soft air option	5 inch Touch screen operator panell	Aluminum parts are of imported 5083-aluminum (eloxal coated)
Mold system is of imported 7075-aluminum (eloxal coated)	Values are monitored numerically and graphically	Vacuum pump (standard 20 M3)	Easy using and moving to vacuum pump steanles still box
Precise measurement with digital vacuum sensor	Possibility of only welding and cutting by one-touch	Stainless steel body of quality 304	Teflon-coated mold system
Photocell unit to use printed film (optional)	Time saving with pneumatic and quick mold system	Completely cuts the film around the plate and does not need extra labor	Energy saving with automatic temperature control system (PID)